

WAC LIGHTING

Archetype

Outdoor Wall Sconce 3000K

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-W15912 12"	3000K	BK Black	10W	800	331

Example: **WS-W15912-BK**

For custom requests please contact customs@wacighting.com

DESCRIPTION

Stately Modern.

FEATURES

- ACLED driverless technology
- 5 year warranty

SPECIFICATIONS

Color Temp:	3000K
Input:	120 VAC,50/60Hz
CRI:	90
Dimming:	ELV: 100-10%
Rated Life:	54000 Hours
Standards:	ETL, cETL,IP65,Title 24 JA8 Compliant Wet Location Listed
Construction:	Aluminum hardware with etched glass diffuser




FINISHES:



Black

LINE DRAWING:

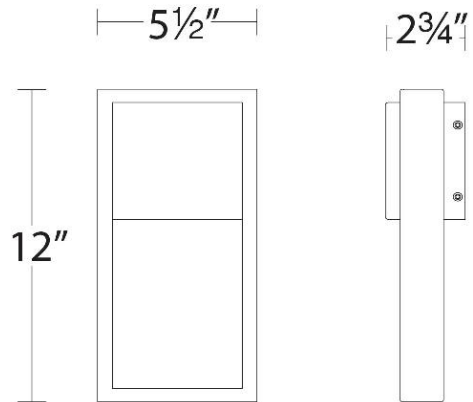

WS-W15912

WAC LIGHTING

Archetype

Outdoor Wall Sconce 3000K

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-W15918 18"	3000K	BK Black	13W	1000	435

Example: **WS-W15918-BK**

For custom requests please contact customs@wacighting.com

DESCRIPTION

Stately Modern.

FEATURES

- ACLED driverless technology
- 5 year warranty

SPECIFICATIONS

Color Temp:	3000K
Input:	120 VAC,50/60Hz
CRI:	90
Dimming:	ELV: 100-10%
Rated Life:	54000 Hours
Standards:	ETL, cETL,IP65,Title 24 JA8 Compliant Wet Location Listed
Construction:	Aluminum hardware with etched glass diffuser




FINISHES:



Black

LINE DRAWING:

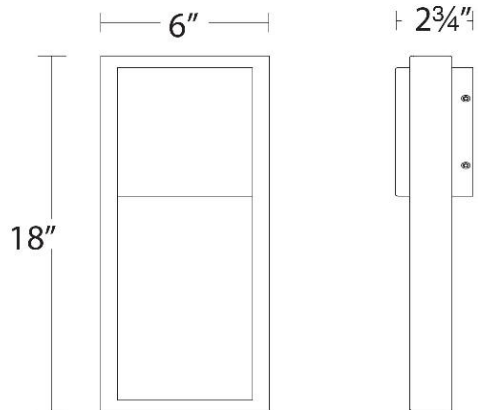

WS-W15918

WAC LIGHTING

Archetype

Outdoor Wall Sconce 3000K

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-W15924 24"	3000K	BK Black	16W	1200	571

Example: **WS-W15924-BK**

For custom requests please contact customs@wacighting.com

DESCRIPTION

Stately Modern.

FEATURES

- ACLED driverless technology
- 5 year warranty

SPECIFICATIONS

Color Temp:	3000K
Input:	120 VAC,50/60Hz
CRI:	90
Dimming:	ELV: 100-10%
Rated Life:	54000 Hours
Standards:	ETL, cETL,IP65,Title 24 JA8 Compliant Wet Location Listed
Construction:	Aluminum hardware with etched glass diffuser




FINISHES:



Black

LINE DRAWING:

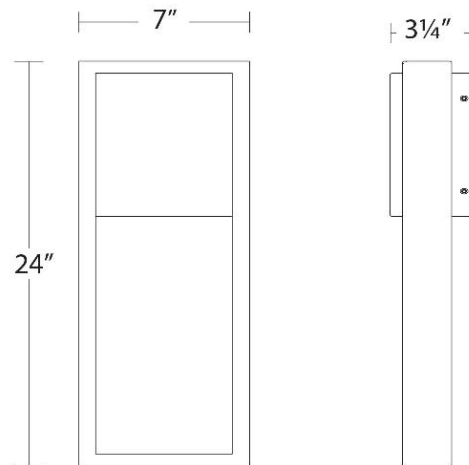

WS-W15924



BRAND

DALS Lighting

DESCRIPTION

The Horizontal LED Step Light is ideal for decks and stairs in indoor and outdoor applications. Die-cast aluminum housing with faceplate available in White, Black, or Silver Grey finish. Non-visible hardware. 120VAC direct connection. Fits on a standard junction box (3 inch length x 2 inch wide x 2.5 inch depth). Junction box must be mounted horizontally. ETL listed.




Shown in: Black

SHADE COLOR	N/A
BODY FINISH	Black
WATTAGE	3W
DIMMER	Low Voltage Electronic
DIMENSIONS	4.72"W x 2.88"H x 0.25"D
LED MODULE INCLUDED	
LAMP	1 x LED/3W/120V LED

Technical Information

LUMINOUS FLUX	100 lumens
LUMENS/WATT	33.33
LAMP COLOR	3000K
COLOR RENDERING	80 CRI

ITEM NUMBER DLS598013

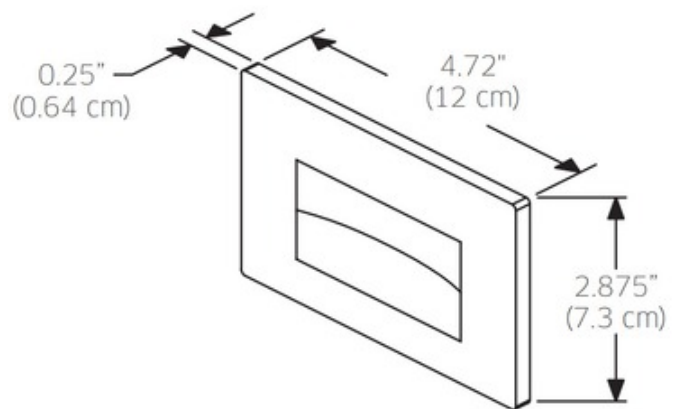

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE

Flux

Add visual interest to your garden with the Flux outdoor path light. A 360° light spread and cast aluminum construction with a powder-coated finish fits best along pathways, garden beds, and walkways.



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
LPP20-CC	20"	8 W	360 lm	80	2200, 2700, 3000, 3500, 4000 K	12 VAC

Specifications

Over 50,000 hours of service life
 12VAC input
 Ground stake included
 93° beam angle
 Frosted lens
 Can be mounted to wood or concrete (screws not included)
 Cast aluminum construction
 Switch-selectable CCT: 2200 K/2700 K/3000 K/3500 K/4000 K
 Suitable for wet locations
 5-year warranty

Note

Low-voltage transformer required.
 Sold separately.

Other color °T and finishes available, but may require MOQ's and longer lead times. Please contact your DALs representative for more information.

Finish

● **BK** Black

Power supplies

LTRP-60-BK

60W, 120VAC 60Hz input
 12VAC output low-voltage transformer

LTR-300-BK

300W, 120VAC 60Hz input
 12/13/14/15VAC output low-voltage transformer

Accessories

LCBL-50-16

50 feet of 16 gauge low-voltage wiring

LCBL-100-16

100 feet of 16 gauge low-voltage wiring

LCBL-50-14

50 feet of 14 gauge low-voltage wiring

LCBL-100-14

100 feet of 14 gauge low-voltage wiring

LCBL-100-12

100 feet of 12 gauge low-voltage wiring

LCBL-200-12

200 feet of 12 gauge low-voltage wiring

LPP20-CC

