


**HALF ROUND COPPER GUTTERS  
AND DOWNSPOUTS**  
NATURAL PATINA



**EXTERIOR  
DOORS AND WINDOWS**  
BRONZE

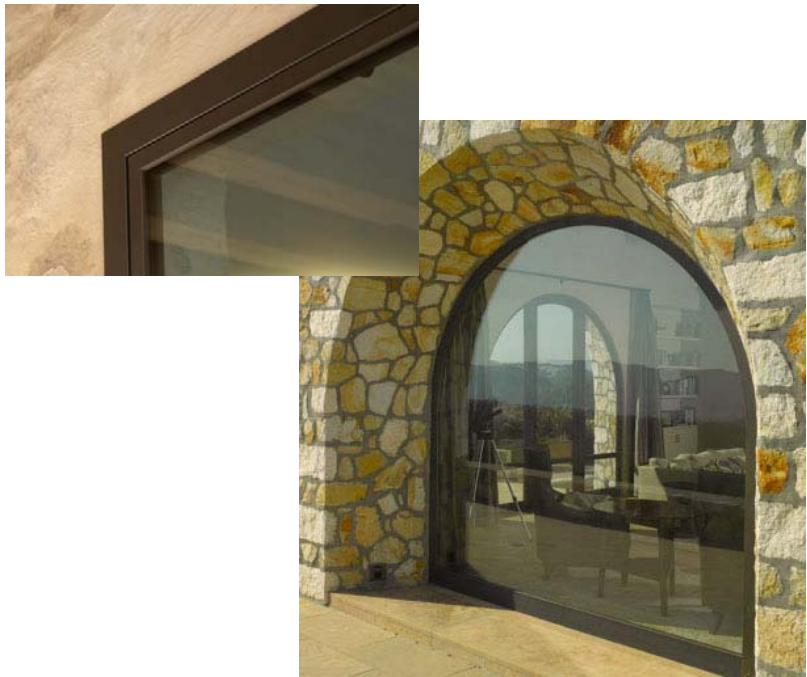

**GRAPESTAKE FENCE**  
RANDOM HEIGHT TO 4 FT



**COLOR AND MATERIAL SAMPLES FOR  
ESPERANZA CARMEL, LLC RESIDENCE**  
SCENIC ROAD 3 SE 9<sup>TH</sup>  
CARMEL-BY-THE-SEA  
APN: 010-302-011



**CLAY 2-PIECE MISSION  
ROOF TILE**  
REDLANDS OR EQUAL



**STONE EXTERIOR WALLS**  
DRYSTACK



**REDWOOD RAFTER TAILS  
& GARAGE DOOR**  
STAINED



**METAL GUARDRAIL**  
BRONZE



Item #  
**8102-A138-L**  
Product Family Name:  
**Kirkham™**  
Category:  
**OUTDOOR WALL MOUNT**  
Certification  
**3057374**  
Patents:  
  
Notes:

UPC Code:  
**747396087214**  
Finish:  
**Aspen Bronze™**  
Category Type:



Image File Name: **8102-A138-L.jpg**



## MEASUREMENTS

Width: <b>11</b>	Length: <b>6.5</b>	Height: <b>12.25</b>	Extension: <b>No</b>
Height Adjustable: <b>No</b>	Min Overall Height: <b>No</b>	Max Overall Height: <b>No</b>	Slope: <b>No</b>
Wire Length: <b>7</b>	Chain Length:	Safety Cable Included: <b>No</b>	Net Weight: <b>1.57</b>
Canopy Width:	Canopy Height:	Canopy Length:	Center to Bottom: <b>3.25</b>
Backplate Width: <b>6.0</b>	Backplate Height:	Center to Top: <b>3.25</b>	

## LAMPING

No. of Bulbs: <b>1</b>	Light Type: <b>L-AC10-MODULE</b>			
Max Bulb Wattage: <b>10</b>	Socket: <b>LED MODULE</b>			
Dimmable: <b>No</b>	Ballast:	Rated Life Hours: <b>30000</b>	Photocell Included: <b>No</b>	Bulb/LED Included: <b>Y</b>
Bulb/LED Included: <b>Yes</b>	Color Temp.: <b>2700</b>	CRI: <b>78</b>	Initial Lumens: <b>450.0</b>	Delivered Lumens: <b>269.3</b>

## SHADE / GLASS

Description:		Material:
Part No.:		Quantity:
Width:	Height:	Length:



## SHIPPING

Carton Width: <b>13.5</b>	Carton Height: <b>9.0</b>	Carton Length: <b>15.0</b>
Carton Weight: <b>3.212</b>	Carton Cubic Feet: <b>1.055</b>	Small Package Shippable: <b>Yes</b>
Master Pack Width:	Master Pack Height:	Master Pack Length:
Master Pack Weight:	Master Cubic Feet:	Multi-Pack: Master Pack: <b>1</b>

**LED**



**Dark Sky**



**Wet  
Location**



**ETL  
Intertek**



**WARNING:** Handling this product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. Wash hands with soap and water after installing, handling, cleaning or otherwise touching this product. For more information go to: [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

For additional information, please contact Customer Care: 1-800-221-7977 | Product depicted on this spec sheet is protected by United States Federal and/or State laws including US Patent, Trademark and/or Copyright and unfair competition laws. Unauthorized reproduction or use carries severe legal penalties.

Rev 06.18.2019 03:22 PM



# Model: WL-LED100

## LEDme® Step Light

# WAC LIGHTING

Responsible Lighting®



Fixture Type:

Catalog Number:

Project:

Location:


### PRODUCT DESCRIPTION

Horizontal rectangle LEDme® Step Light. Designed for safety and style on stairways, patios, decks, balcony areas, walkways and building perimeters.

Features an architectural design. Energy efficient for long-lasting indoor and outdoor lighting solutions. Creates an attractive, romantic impression at night.

### FEATURES

- Solid diecast brass, corrosion resistant aluminum alloy, or cast stainless steel construction
- Direct wiring, no driver needed
- Low profile, flush to wall aesthetics with no visible hardware
- 54,000 hour rated life
- Balanced lighting, free of shadows with minimum glare
- IP66 rated, Protected against high-pressure water jets
- Up to 200 fixtures can be connected in parallel
- 5 year WAC Lighting product warranty

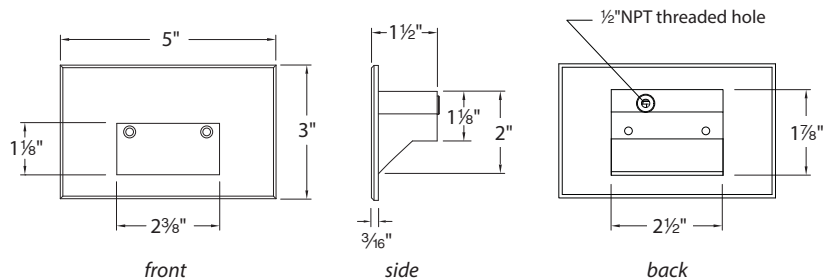

### SPECIFICATIONS

**Construction:** Die-cast aluminum or 316 marine grade cast stainless steel

**Power:** Direct wiring, no remote driver needed. Input voltage: 120V or 277VAC 50/60Hz

**Light Source:** 3000K CCT Samsung HV-AC High Power LED, CRI: 90  
Optional color lenses. Total power consumption of 3.5W

**Mounting:** Fits into 2" x 4" J-Box with minimum inside dimensions of 3"L x 2"W x 2"H  
Includes bracket for J-Box mount.

**Dimming:** Dim to 10% with electronic low voltage (ELV) dimmer  
Approved dimmers: Lutron Nova-T NTELV-300 & NTELV-600, Lutron Vietri VTELV-600, Lutron Diva DVELV-300P, Lutron Skylark SELV-300P, Lutron Maestro MAELV-600

**Standards:** IP66, UL & cUL Listed for wet locations, Title 24 JA8-2016 Compliant.

### ORDER NUMBER

Model #	Light Color	Finish
<b>WL-LED100</b> 120V	<b>C</b> White 3000K	<b>BK</b> Black on Aluminum
<b>WL-LED100F</b> 277V	<b>AM</b> Amber 610nm	<b>BN*</b> Brushed Nickel on Aluminum
	<b>RD</b> Red 640nm	<b>BZ</b> Bronze on Aluminum
	<b>BL</b> Blue 450nm	<b>GH</b> Graphite on Aluminum
		<b>SS</b> Stainless Steel
		<b>WT</b> White on Aluminum
<b>WL-LED100</b> 120V	<b>C</b> White 3000K	<b>BBR</b> Bronze on brass ←
	<b>AM</b> Amber 610nm	

\*Brushed Nickel Finish is for interior use only



Example: **WL-LED100F-BL-SS**

waclighting.com  
Phone (800) 526.2588  
Fax (800) 526.2585

Headquarters/Eastern Distribution Center  
44 Harbor Park Drive  
Port Washington, NY 11050

Central Distribution Center  
1600 Distribution Ct  
Lithia Springs, GA 30122

Western Distribution Center  
1750 Archibald Avenue  
Ontario, CA 91760

### NOTICES

Metacrylics® products must be applied and installed according to written specifications from the manufacturer. Metacrylics® assumes no liability for failures of this roof/deck system resulting from deviation from manufacturer's written specification, poor workmanship, or delamination of an existing underlying roof/deck membrane. The manufacturer makes no warranty of any kind, express or implied, concerning this roof/deck system, if it is not used according to manufacturer's specifications.

### SOURCES

Presented Above Are: ASTM and FTMS performed by Underwriters Laboratories, Inc., Cal Coast Laboratories, Inc., Harlan Associates, Inc., State of Calif. Dept. of Transportation (Division of Structures and Engineering Services) Office of Transportation Laboratory, Sacramento, CA; State of Calif. Air Resources Board, Sacramento, CA; State of Calif. Dept. of Health; State of Calif. Bay Area Air Pollution Control Dist.; field experience of construction contractors and California Builder & Engineer. Metacrylics® is not responsible for any changes in the above data due to discovered data or changes in the above tests.

### MANUFACTURER

Metacrylics®  
 365 Obata Court  
 Gilroy, CA 95020  
 Office: (408) 280-7733  
 fax: (408) 280-6329

## SPECIFICATIONS

**STITCHBONDED POLYESTER ROOFING FABRICS T272, T325, T326, W201** Metacrylics® stitchbonded polyester is one of the strongest materials available to the roofing industry for use as reinforcement in Metacrylics® roofs and deck systems. Stitchbonding offers an unusual combination of high strength properties with good elongation for excellent thermal stress force accommodations.

### METACRYLICS POLYESTER ROOFING FABRICS

**Metacrylics T272** fabric is our standard and most requested fabric from contractors and customers. Metacrylics T272 is a soft stitchbonded polyester that will readily conform to embedded gravel, irregular, and smooth roof surfaces. It is also much easier to handle and apply properly than other soft polyester sheets.

**Metacrylics T325** fabric is a soft stitchbonded polyester that will readily conform to embedded gravel, irregular, and smooth roof surfaces. It is also much easier to handle and apply properly than other soft polyester sheets.

**Metacrylics T326** is also stitchbonded polyester but has a firm finish to reduce wrinkles during application on smooth roof surfaces.

**Metacrylics W201** A warp knit mat designed specifically for jobs where lower coating application rates necessitate a polyester that does not absorb as much coating.


## AVERAGE TYPICAL PROPERTIES

### SPECIFICATIONS


	Test Method	T272	T325	T326	W201
Weight	N/A	3oz/yd <sup>2</sup>	2.75oz/yd <sup>2</sup>	2.9oz/yd <sup>2</sup>	2.75oz/yd <sup>2</sup>
Tensile	ASTM D 1682	57.1lbs*	31.6*	41lbs*	75 lbs*
Elongation	ASTM D 1682	61.65%*	40.6*	25.8*	42.9*
Mullen Burst	ASTM D 3786	176.8lbs	99.6 lbs	127lbs	150lbs
Trapezoid	ASTM D 1117	16.1lbs	13.2 lbs*	14.2lbs*	13.4lbs*

\*Average machine and cross machine direction.

\*\*These average typical properties are the average results of random tests conducted on this fabric by an independent testing laboratory. They are not to be construed as performance specifications. This document reports accurate and reliable information to the best of our knowledge, but our suggestions and recommendations cannot be guaranteed because the conditions of use are beyond our control. Information presented herein is given without reference to any patent questions which may be encountered in the use thereof. Such questions should be investigated by those using this information. Tietex Corporation assumes no responsibility for the use of information presented herein and hereby expressly disclaims all liability in regard to such use.

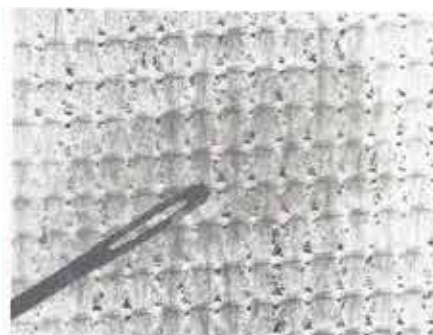

Metacrylics T272

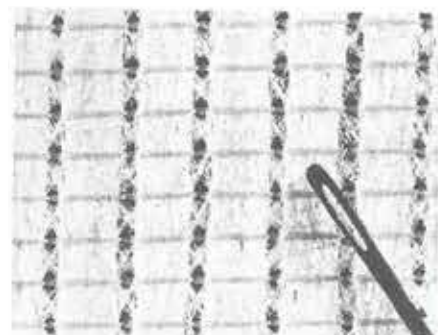

Metacrylics T325 & T326

## PACKAGING

**Metacrylics® T272, T325, T326, W201** Stitchbonded Polyester Fabric are packaged as follows:

**ROLL SIZE** 10 Square Roll - 10.8 squares gross, 10.0 squares net applied (3" single-ply overlap).

**ROLL DIMENSIONS** T325, T326 & T272 rolls are 40-inches wide x 324 feet long, with lap lines for one and two ply application. Roll Weight-about 20-22 pounds. W201 rolls are 42-inches wide x 300 feet long.

## OTHER ROLL SIZES

Fabric widths 2" to 20" for T325, T326 & T272 rolls are sold in the 160' length sizes. W201 are sold in 300' lengths.

### T272, T325, T326

- 10 Square Roll - 324' x 40"
- 3 Square Roll - 108' x 40"
- 1 Square Roll - 30' x 40"
- 20" width x 160' length
- 12" width x 160' length
- 9" width x 160' length
- 6" width x 160' length
- 4" width x 160' length
- 2" width x 160' length

### W201

- 10 Square Roll - 300' x 42"
- 20" width x 300' length
- 12" width x 300' length
- 9" width x 300' length
- 6" width x 300' length
- 4" width x 300' length

## IMPORTANT APPLICATION INFORMATION

**DO NOT APPLY** if rain or freezing weather is imminent within 24 hours following application, or during fog or drizzle.

**KEEP AWAY FROM CHILDREN.**

**DO NOT APPLY** when temperatures are consistently below 40° F. The Acrylic Coating dries slowly when temperatures are below 55° F. Areas shaded from sunlight dry very slowly. Seventy-two hours or more may be required for proper curing.







Chamois



Sugar Cookie



Bufftone



Verte



Lizard



Gray



Storm Cloud



Benton Harbor



Signature Blue



Dark as Night



Oak Buff



Concrete



Allspice



Bison Beige



Carob Brown



Beige



Desert Sand



Pagan



Cordovan



Coach Lamp Copper